

# Fabricated Castors



## 6000 Series (Swivel)


Size: 100mm, 125mm, 160mm, 200mm & 250mm

## 6050 Series (Fixed)

Size: 100mm, 125mm, 160mm, 200mm & 250mm


Extremely heavy duty fabricated swivel & fixed castors. Precision bearings in swivel head and wheel on 160mm, 200mm and 250mm diameters. Available with cast iron or polyurethane wheels.

### Castor Reference and Load Capacity

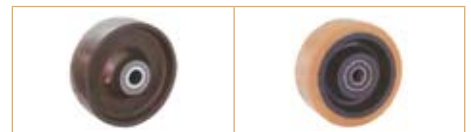

Wheel Diam.	Tread width (mm)	Castor Type	Castor Height	Plate size	Bolt Hole spacim' (mm)	Bolt Diam.	Swiv. Rad.	Cast Iron	Polyurethane
4" 100mm	CI=45 SUB=50	Swivel	145mm	135 x 110mm	105 x 80/75mm	10mm	92mm	TSH-100-C11H 320kg	100-6000-SUB 450kg
		Fixed	145mm	135 x 110mm	105 x 80/75mm	10mm	-	TFH-100-C11H 320kg	100-6050-SUB 450kg
5" 125mm	CI=45 SUB=50	Swivel	170mm	135 x 110mm	105 x 80/75mm	10mm	110mm	TSH-125-C11H 630kg	125-6000-SUB 550kg
		Fixed	170mm	135 x 110mm	105 x 80/75mm	10mm	-	TFH-125-C11H 630kg	125-6050-SUB 550kg
6" 160mm	60mm	Swivel	205mm	135 x 110mm	105 x 80/75mm	11mm	137mm	-	160-6000-SUB 860kg
		Fixed	205mm	135 x 110mm	105 x 80/75mm	11mm	-	-	160-6050-SUB 860kg
8" 200mm	60mm	Swivel	245mm	135 x 110mm	105 x 80/75mm	11mm	166mm	-	200-6000-SUB 1200kg
		Fixed	245mm	135 x 110mm	105 x 80/75mm	11mm	-	-	200-6050-SUB 1200kg
10" 250mm	80mm	Swivel	305mm	200 x 160mm	160 x 120mm	14mm	199mm	-	250-6000-SUB 1700kg
		Fixed	305mm	200 x 160mm	160 x 120mm	14mm	-	-	250-6050-SUB 170kg

## OPTIONAL EXTRA



**Combined Swivel and Wheel Brake**

Available on 125mm, 160mm, 200mm and 250mm sizes. Foot operated brake simultaneously brakes both wheel and swivel head. To order add suffix 'SWB' to castor reference.

**Swivel Radius**

The swivel radius is increased when brakes are fitted.

- 125mm wheels: increased by 40mm
- 160mm wheels: increased by 20mm
- 200mm wheels: increased by 20mm
- 250mm wheels: increased by 20mm